


TWIN WELDING

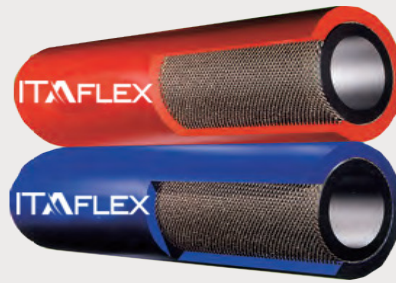

Twin welding oxygen/acetylene delivery hose for welding and technical applications in shipyards, construction and manufacturing industries.

WP 20 BAR

TECHNICAL
CHARACTERISTICS

TUBE	Black synthetic rubber tube;
REINFORCEMENT	High tensile textile reinforcement;
COVER	Blue/Red special rubber cover - abrasion - heat and weather resistant; Smooth finish
TEMPERATURE	-25° C to +80° C
	ISO 3821

CODE	Inner Diameter ID		Outside Diameter OD		Working Pressure		Burst Pressure		Theoretical Weight
	mm	inch	mm	inch	bar	psi	bar	psi	Kg/m
91WT200606	6+6	1/4" + 1/4"	13 +13	33/64" + 33/64"	20	290	60	870	0,300
91WT200808	8+8	5/16" + 5/16"	15+15	19/32" + 19/32"	20	290	60	870	0,370
91WT201010	10+10	3/8" + 3/8"	17+17	43/64" + 43/64"	20	290	60	870	0,460